


Rhino-Rack 2500 Series

Instruction for DK471 and RS719			FRONT						REAR					
					Crossbar Identification						Crossbar Identification			
		VA			EURO	HD			VA VA	EURO	HD			
Vehicle	Date	Crossbar	Front Right Pad/Clamp		Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp		Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
KIA Rio 5dr hatch	17-	1180mm	M282 SUB0370	M281 SUB0370	188mm	133mm	944mm / 37,11/64"	OUT	M284 SUB0459	M283 SUB0459	143mm	88mm	854mm / 33,5/8"	OUT
			Pad Arrow Forward				37,11/04			Arrow vard			33,5/6	

Table above refers to Direction of Pad Arrow and Foot Plate Arrow when fitted on the vehicle.

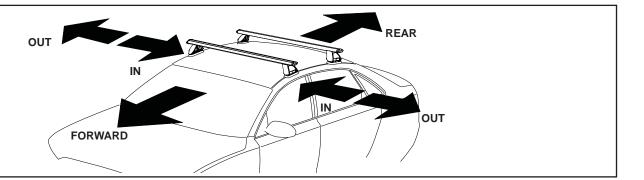

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.





Rhino-Rack 2500 Series

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

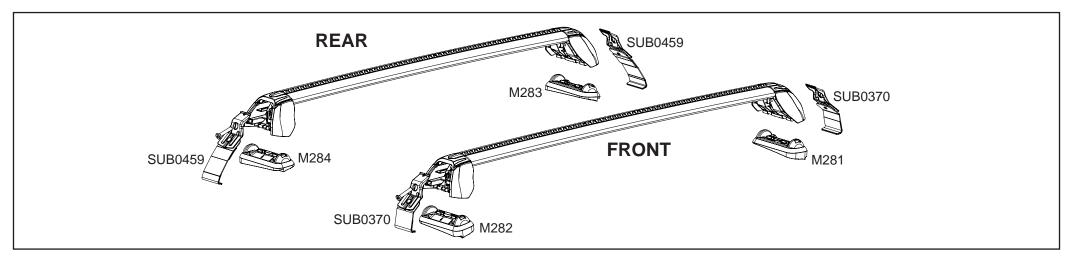

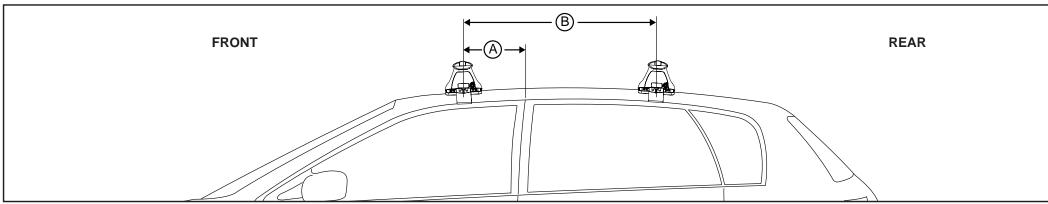

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)	
KIA Rio 5dr hatch	17-	300mm / 11,13/16"	720mm / 28,3/8"	75kg / 165lbs	