





**CROSSBAR IDENTIFICATION**




*VA crossbar*



*Steel Euro crossbar*



*EURO crossbar*



*HD crossbar*

Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR						
			Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
KIA Sportage (bare roof)	16-	1260mm	142614 SUB0256	142613 SUB0256	198mm	85mm	1044mm / 41, 1/8"	OUT	142659 SUB0381	142660 SUB0381	178mm	65mm	1004mm / 39, 1/2"	OUT
			Pad Arrow OUT						Pad Arrow REAR					



# Rhino Rack 2500 Series - DK496 instruction

**CONTROLLED**



**Measurement A:** CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B:** CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

**Carrying capacity:** Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

## Direction of Pad Arrow and Foot Plate Arrow

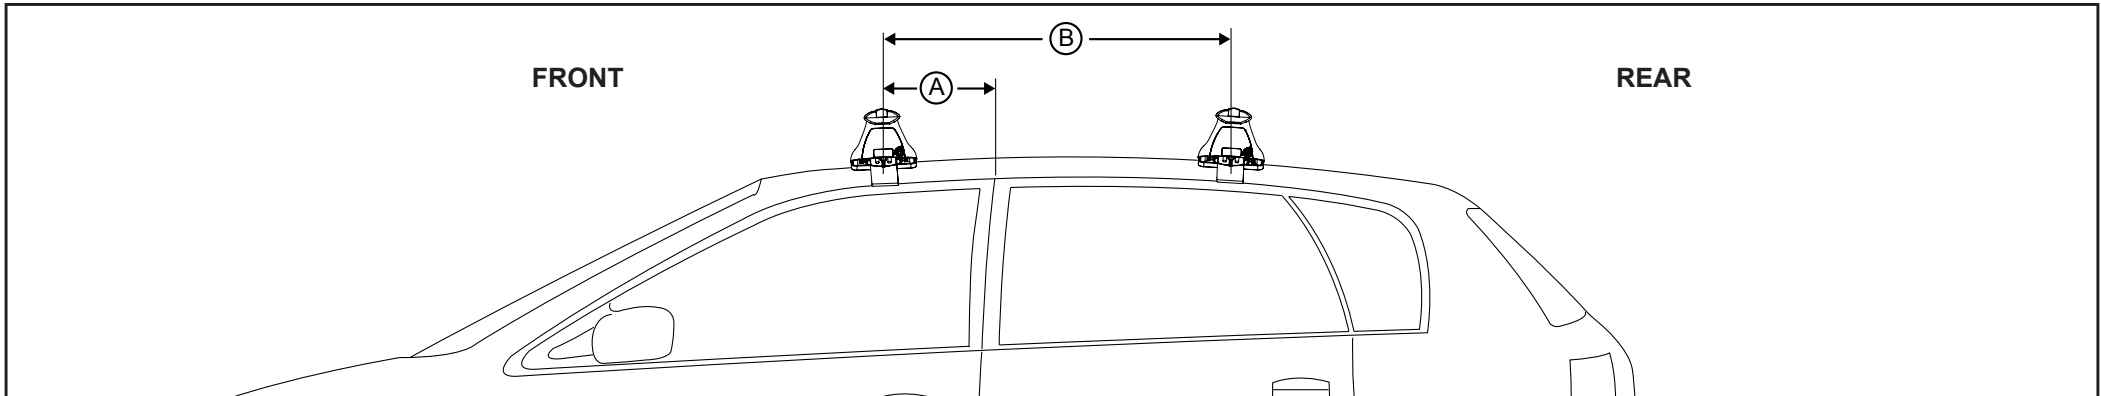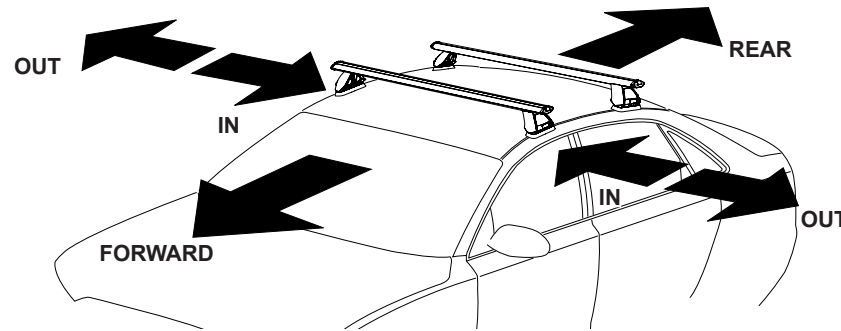

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
KIA Sportage (bare roof)	16-	220mm / 8,11/16"	750mm / 29,1/2"	75kg / 165lbs